

FIG. 1

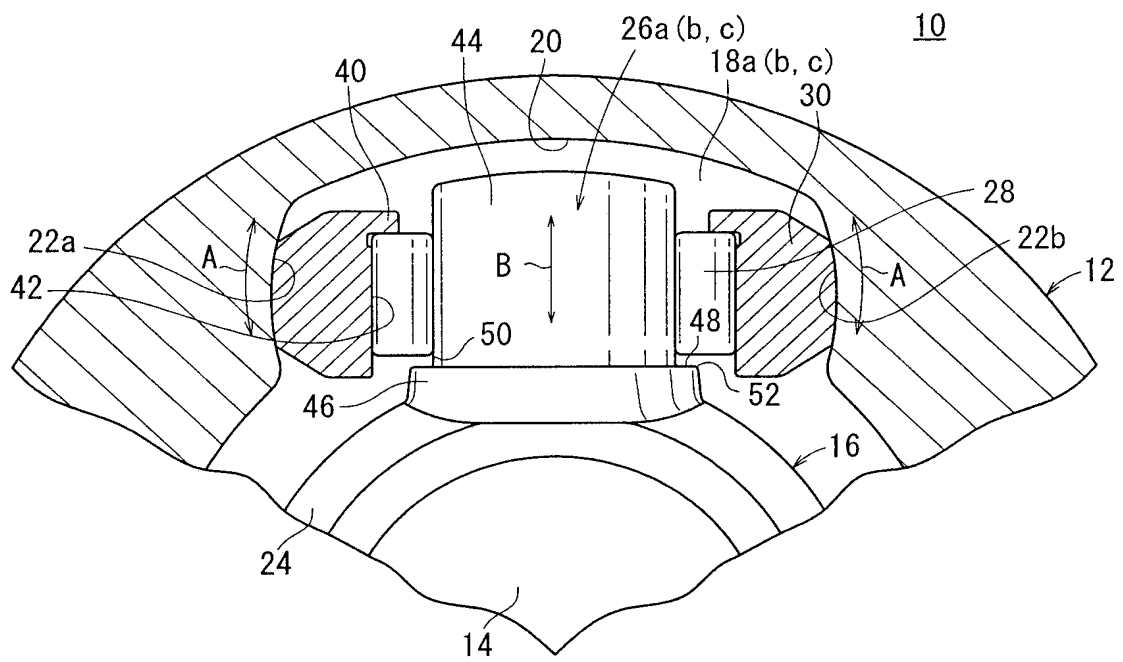


FIG. 2

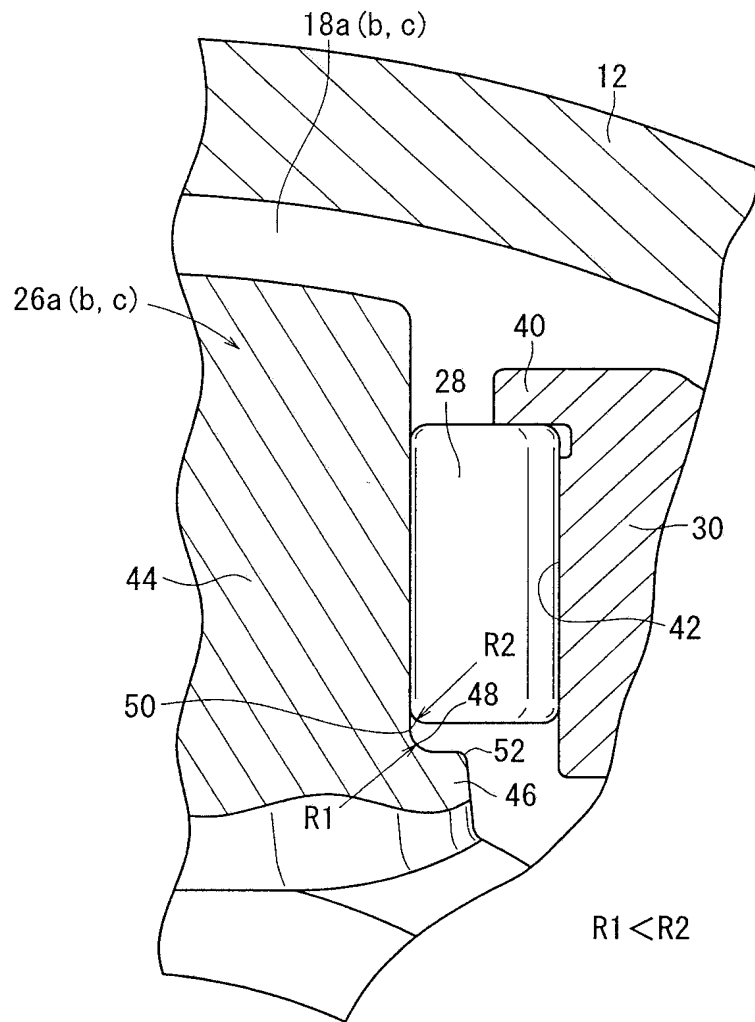


FIG. 3

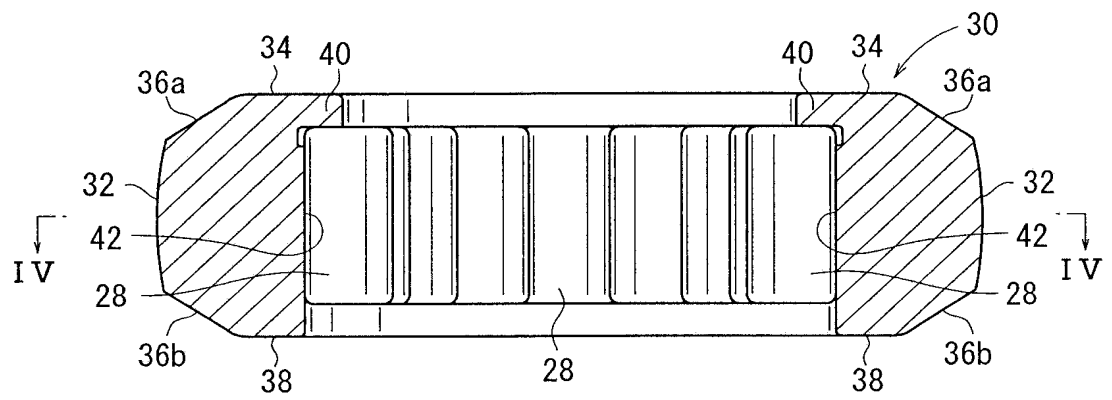


FIG. 4

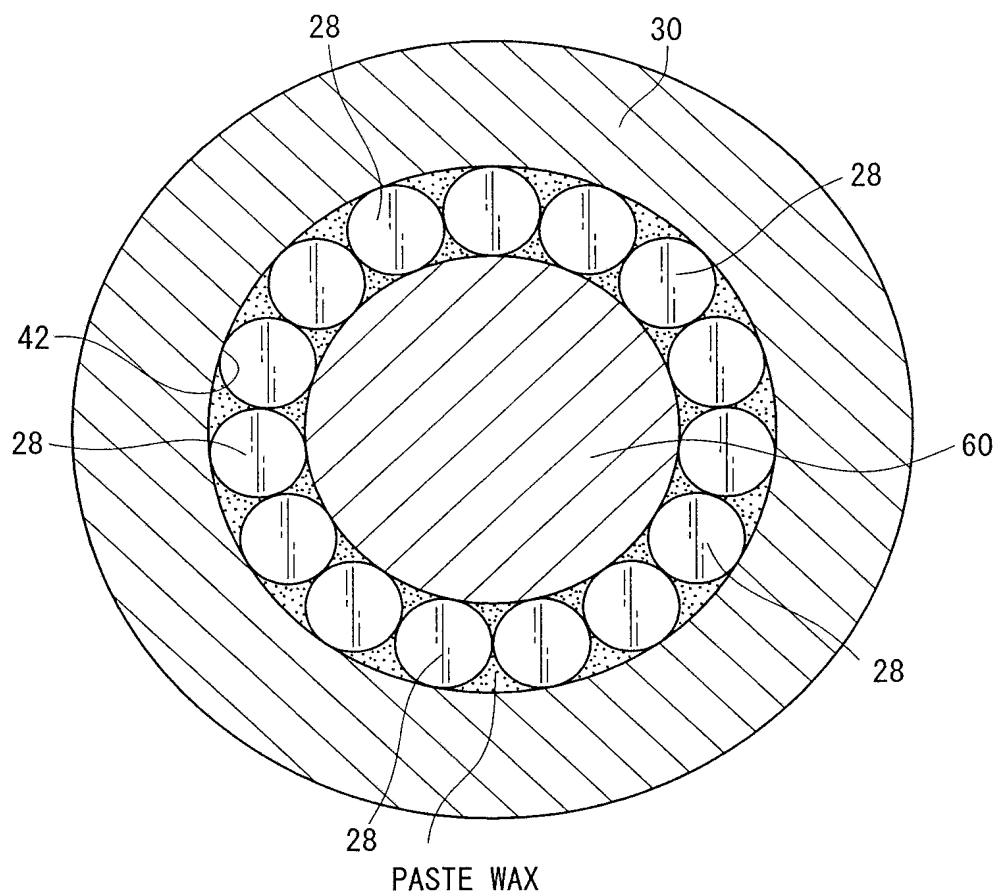


FIG. 5

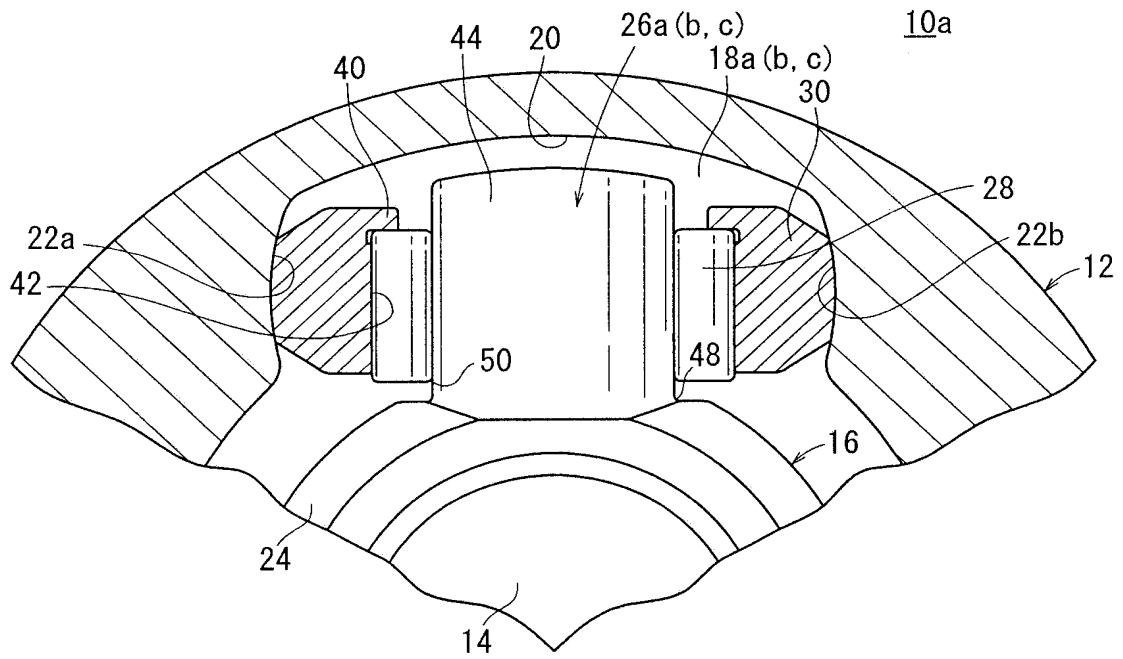


FIG. 6

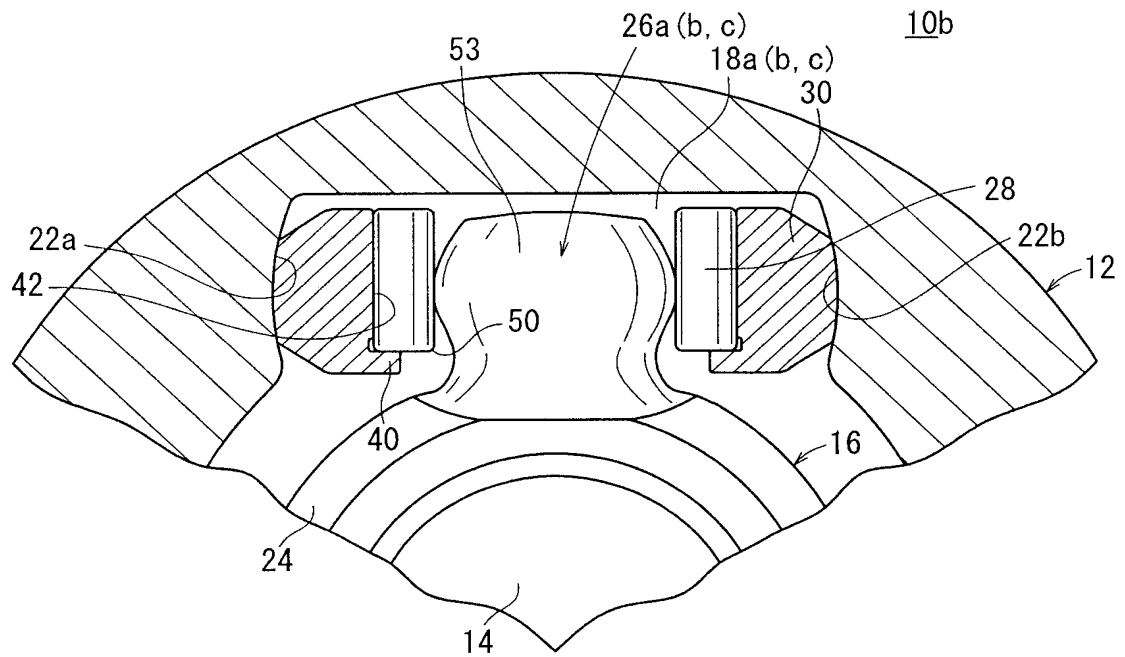


FIG. 7

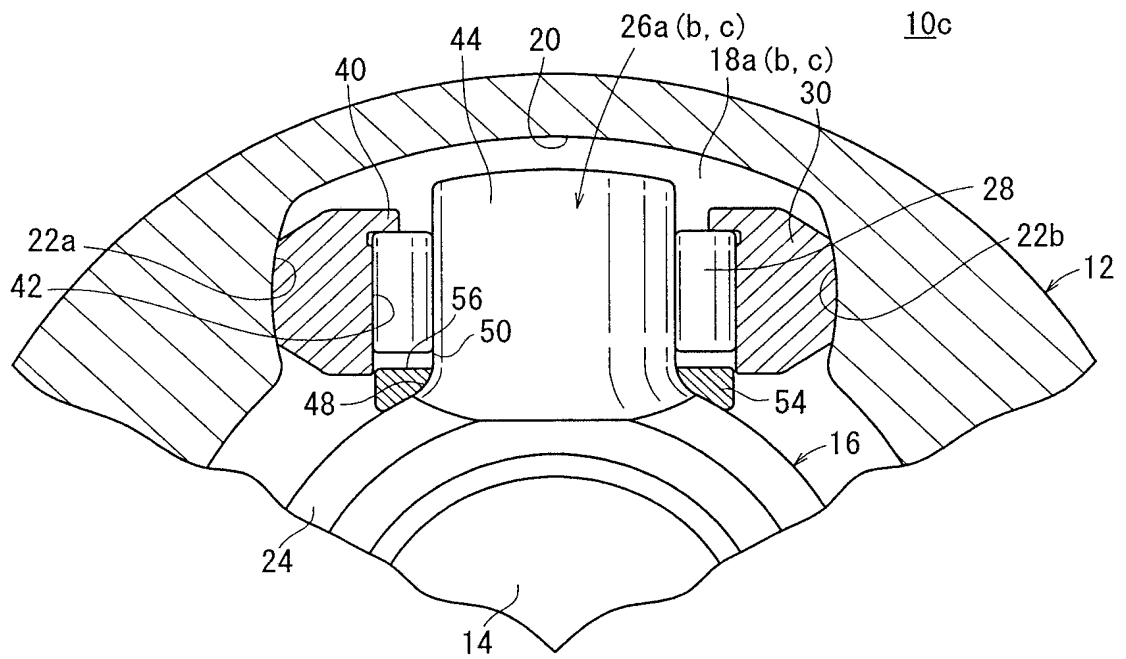


FIG. 8

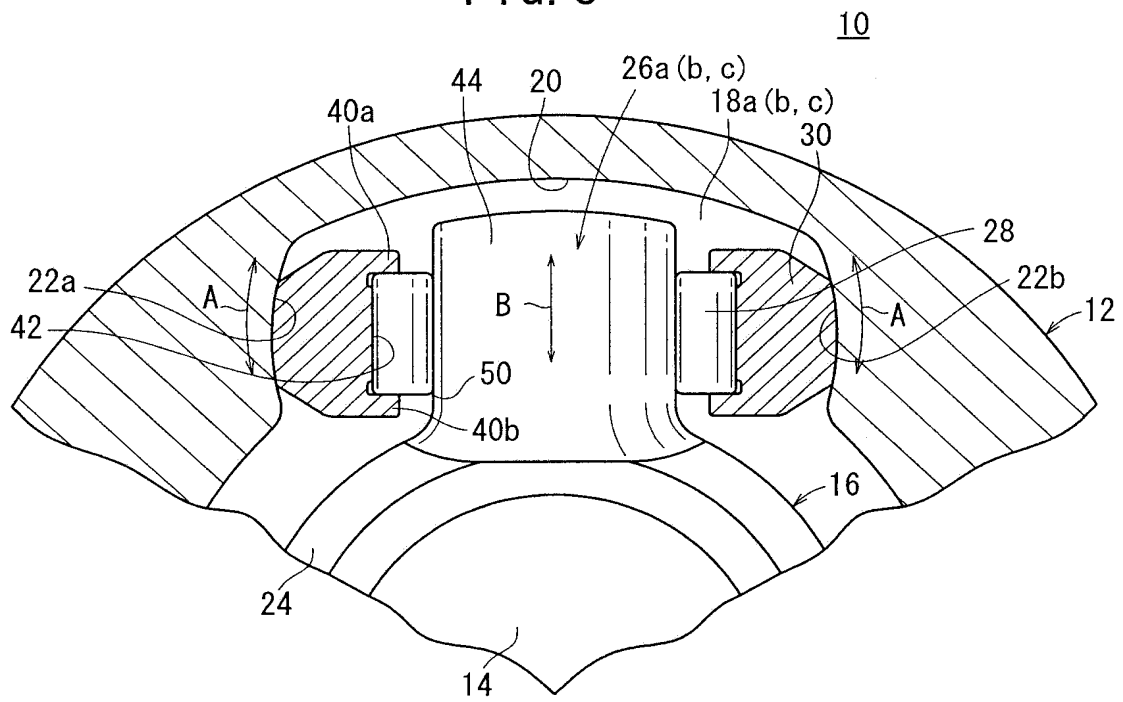




FIG. 9

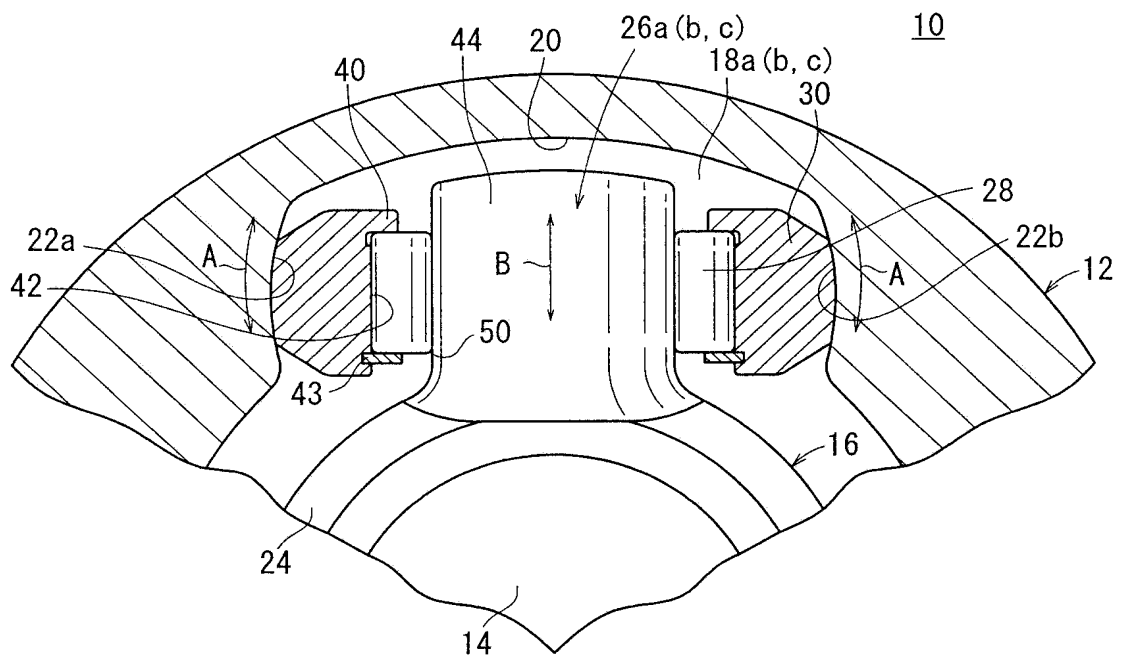


FIG. 10

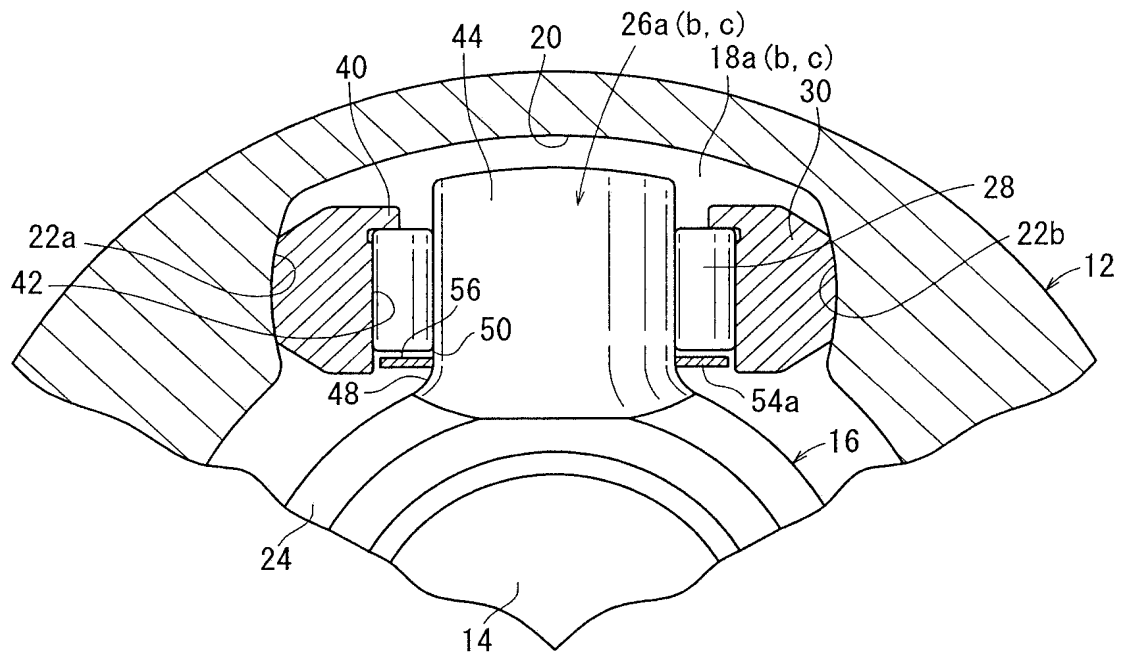


FIG. 11

	CONSISTENCY (ORDINARY TEMPERATURE)								
	0	50	100	150	200	250	300	350	400
NEEDLE-- RETAINING PERFORMANCE	○	○	○	○	○	○	△	×	×
COMPATIBILITY WITH RESPECT TO GREASE	×	△	○	○	○	○	○	○	○
ASSEMBLING PERFORMANCE	×	△	○	○	○	○	○	○	○
ROTATIONAL RESISTANCE	△	○	○	○	○	○	○	○	○

FIG. 12

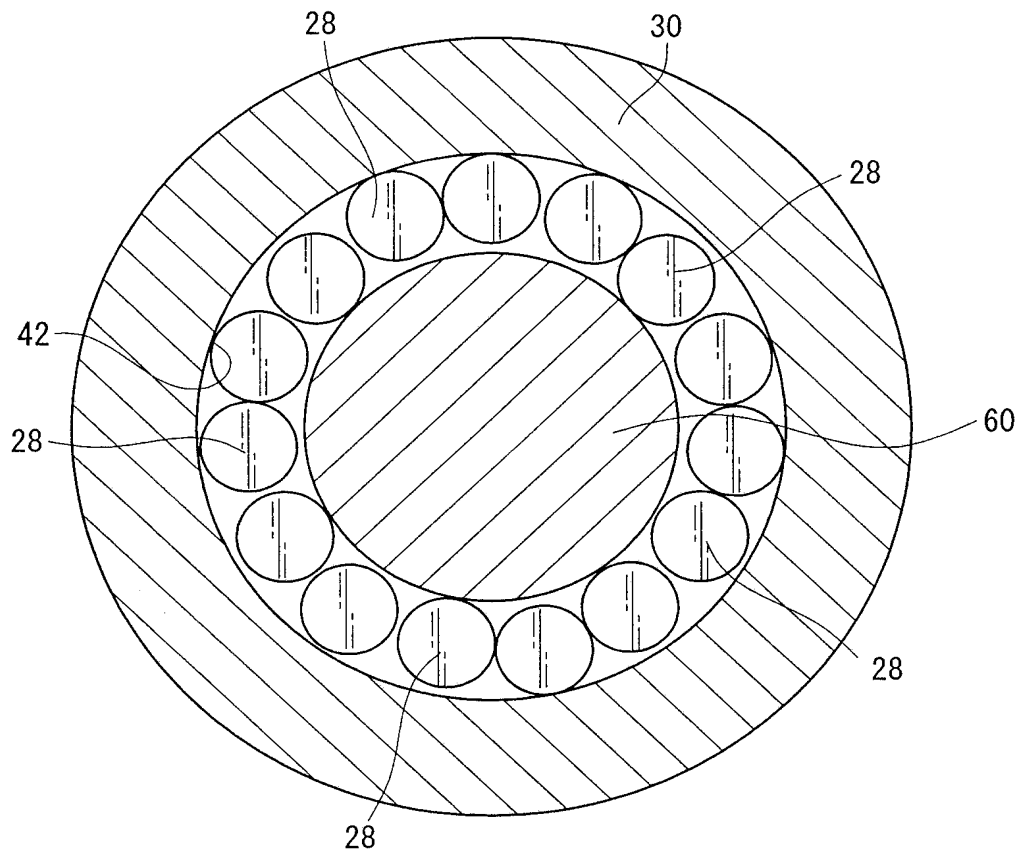


FIG. 13

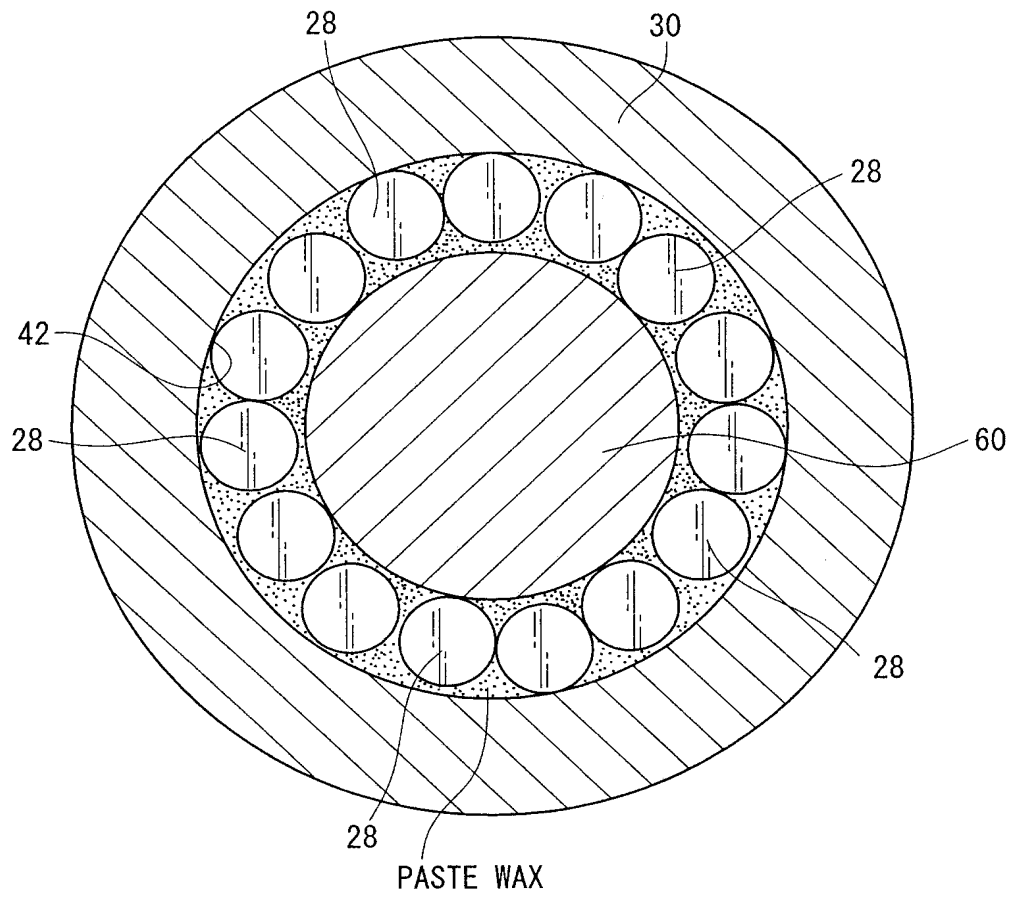


FIG. 14

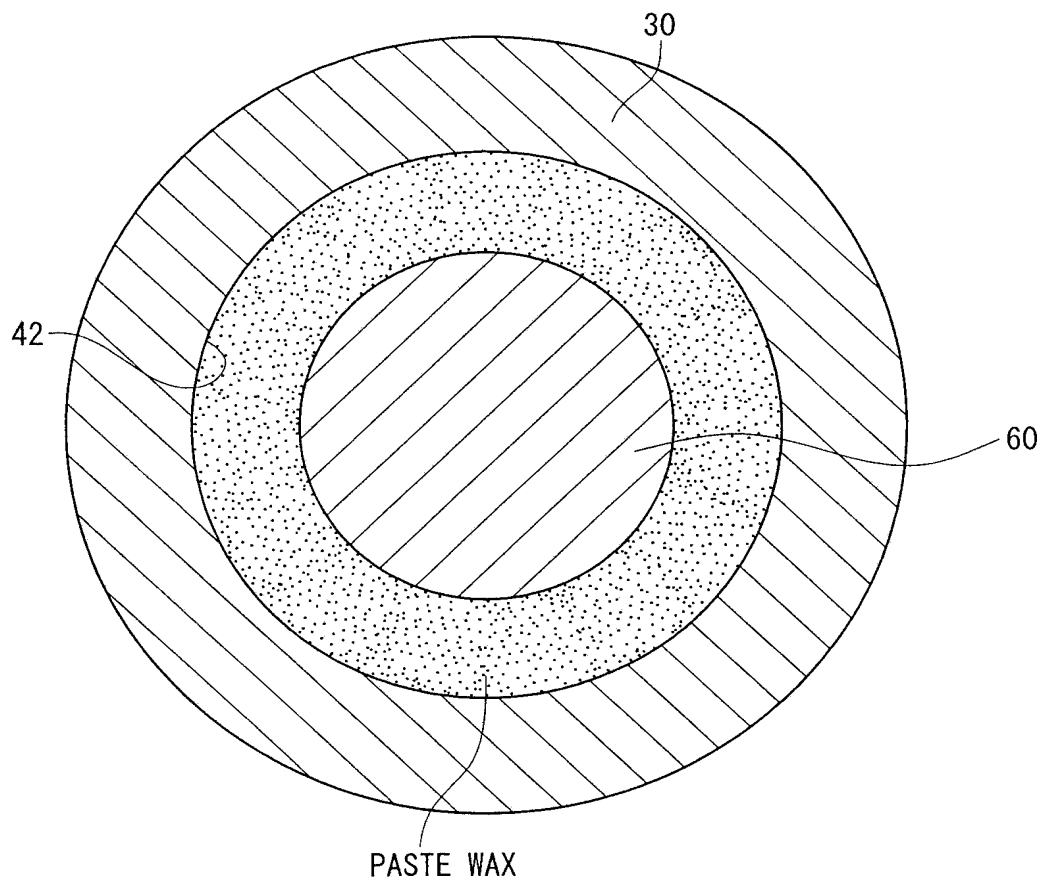


FIG. 15

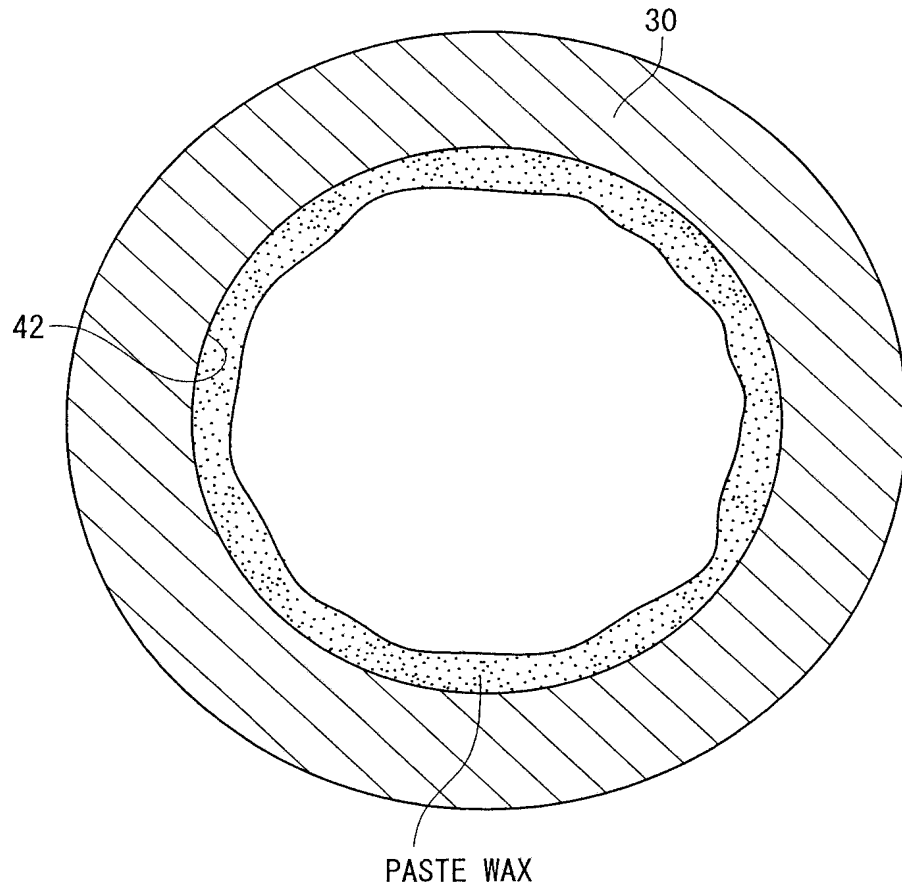


FIG. 16

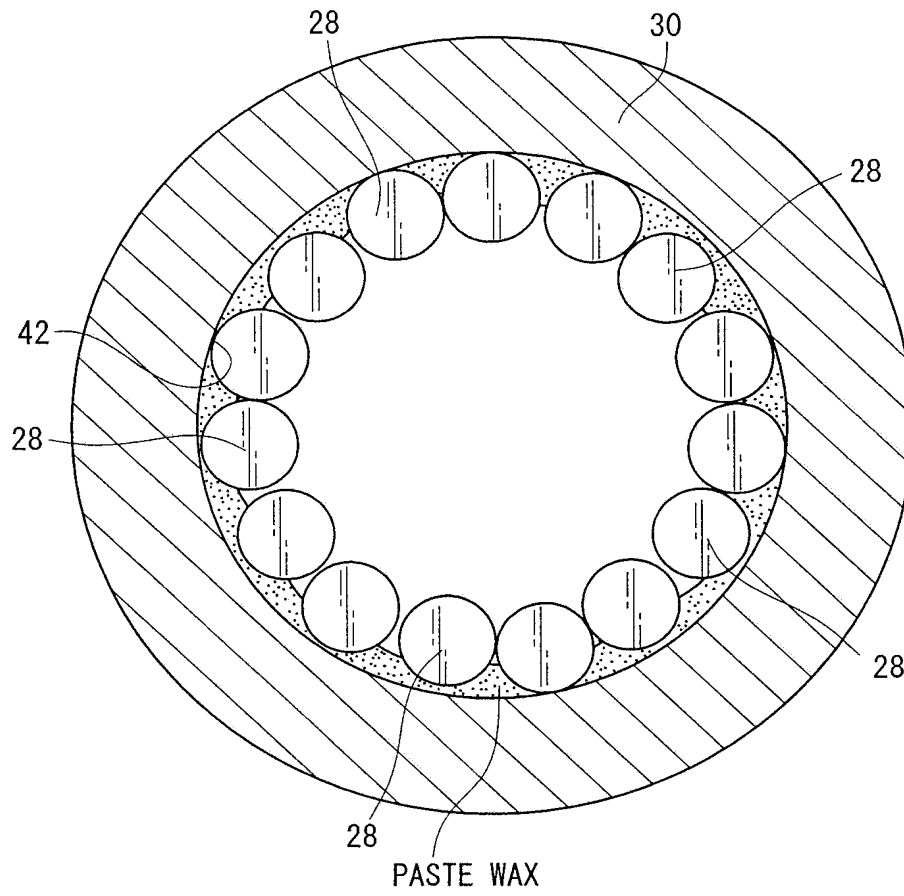




FIG. 17

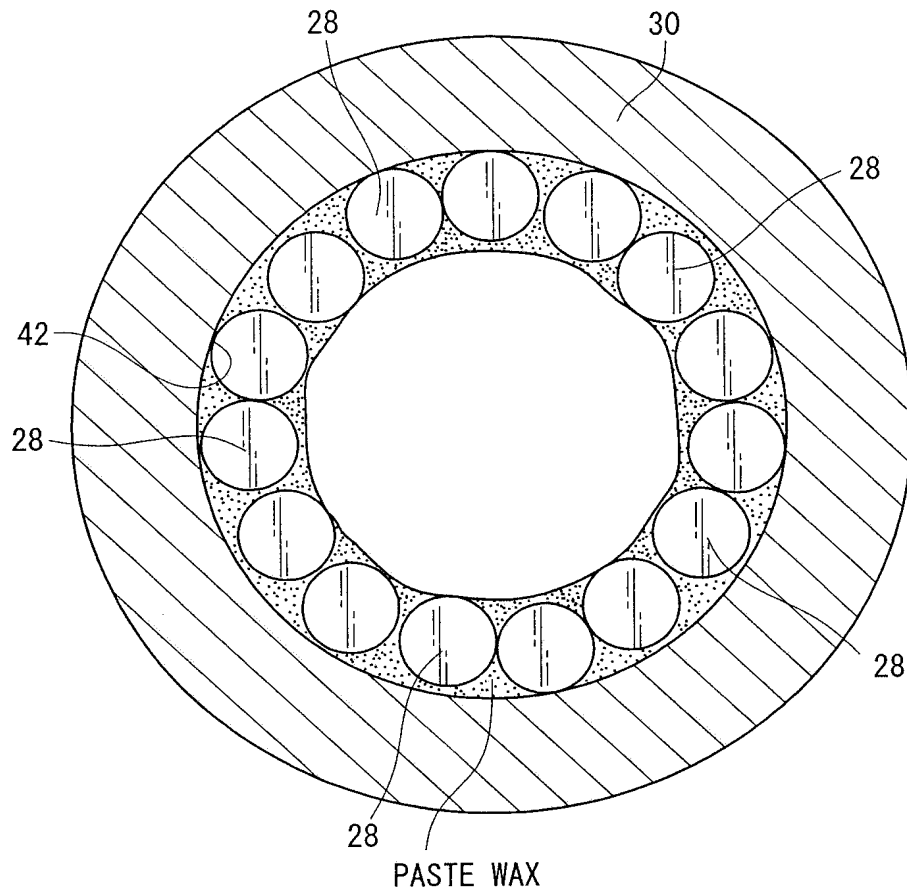


FIG. 18

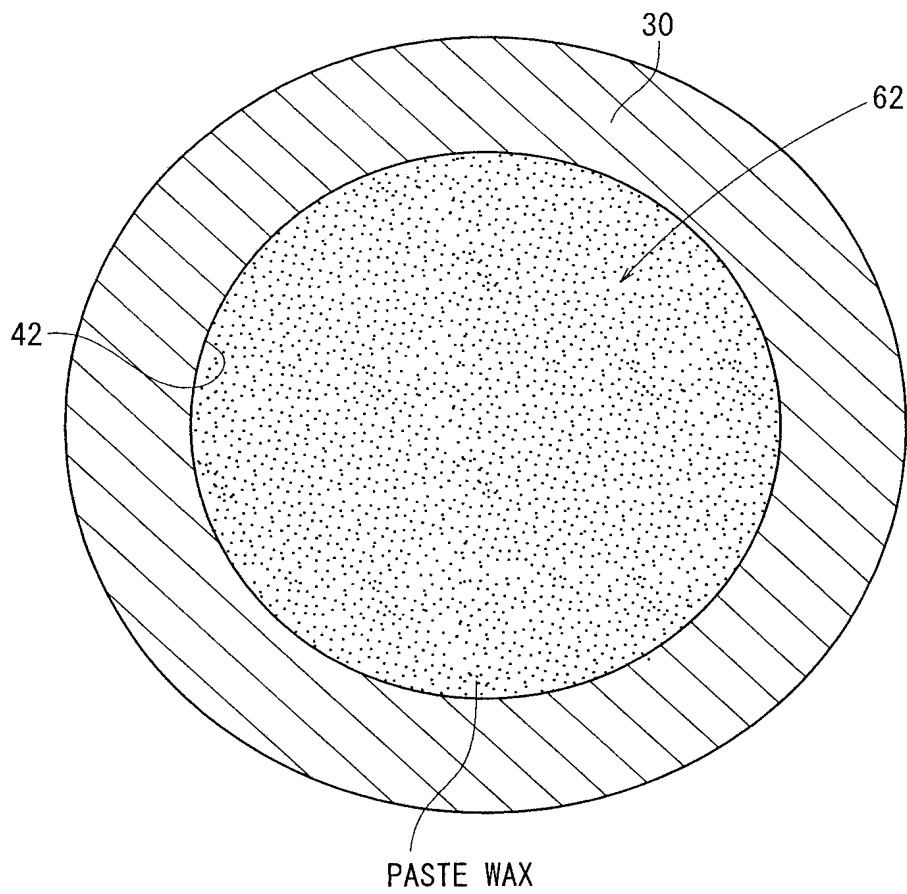


FIG. 19

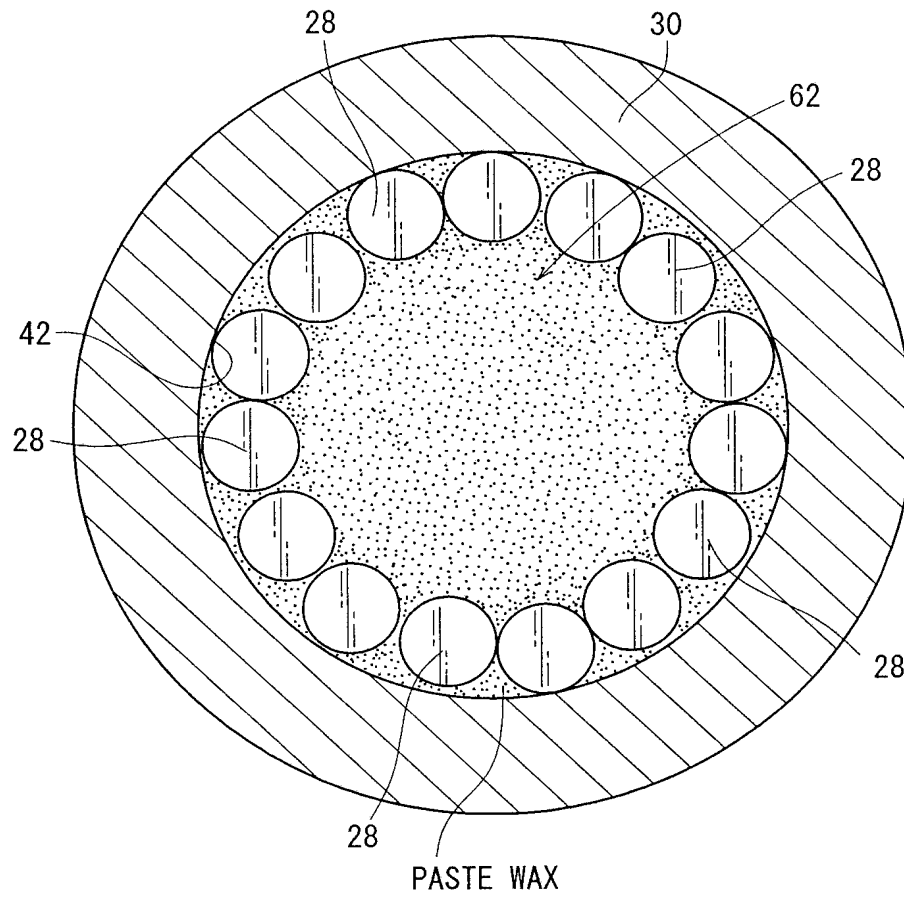


FIG. 20

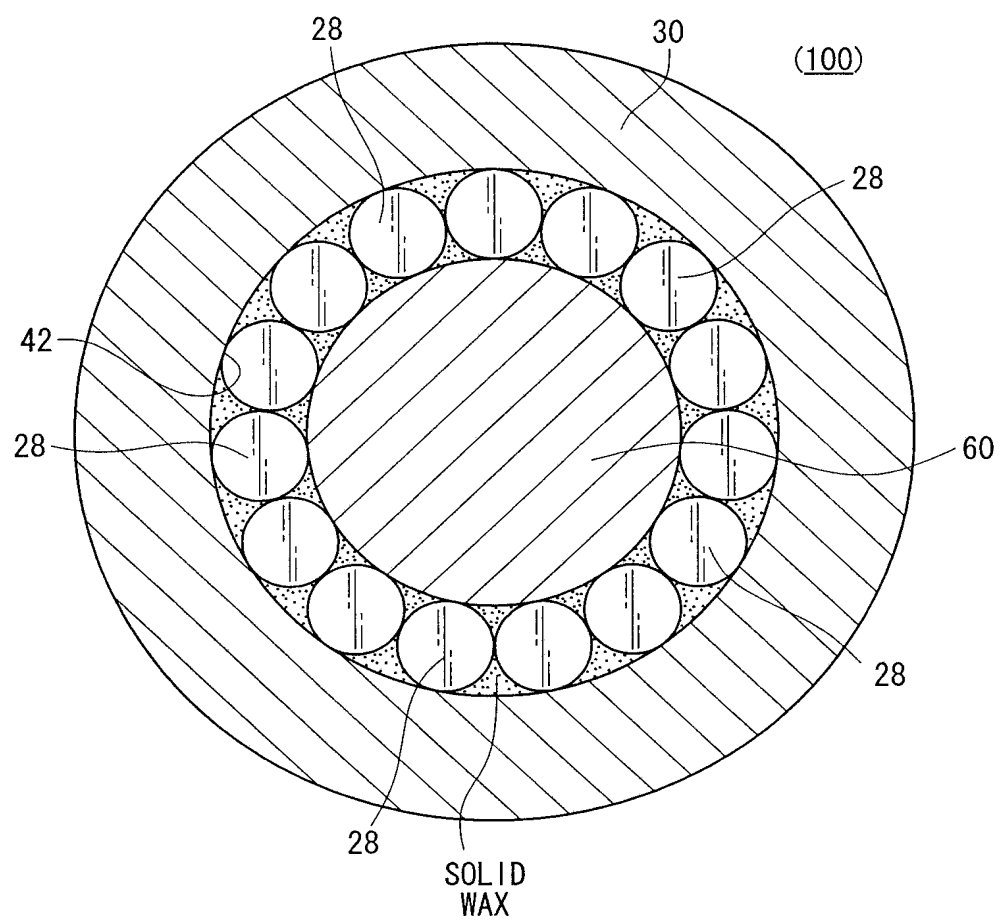


FIG. 21

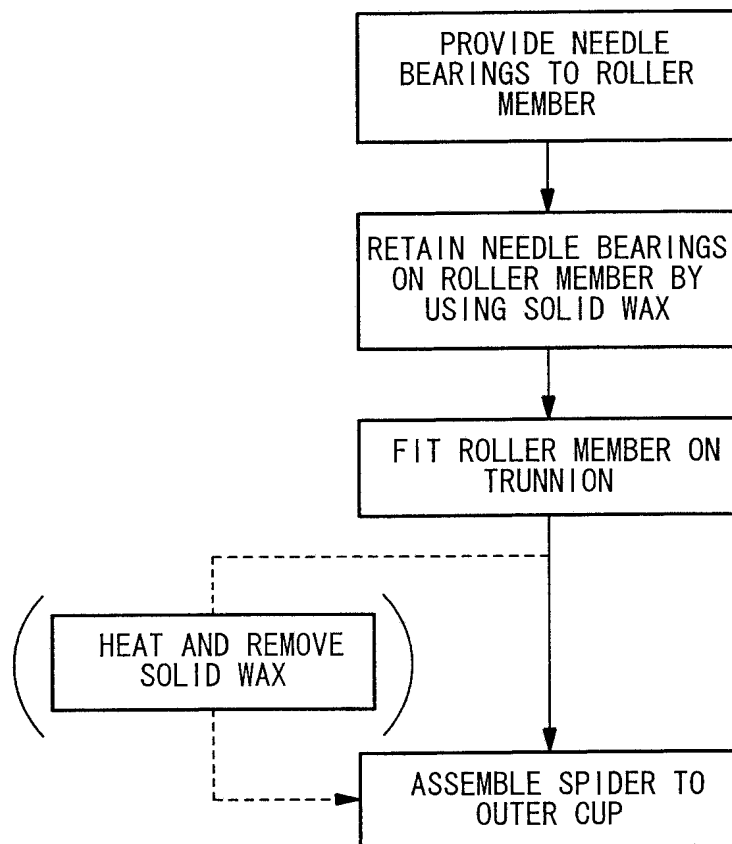


FIG. 22

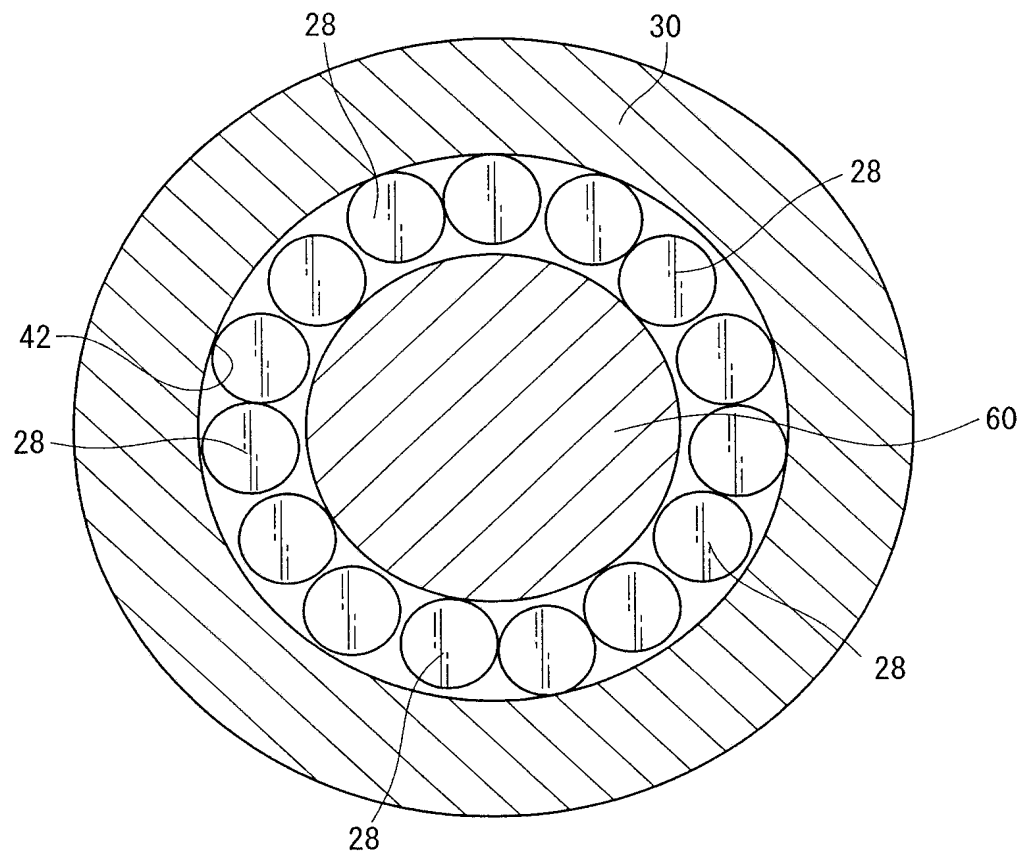


FIG. 23

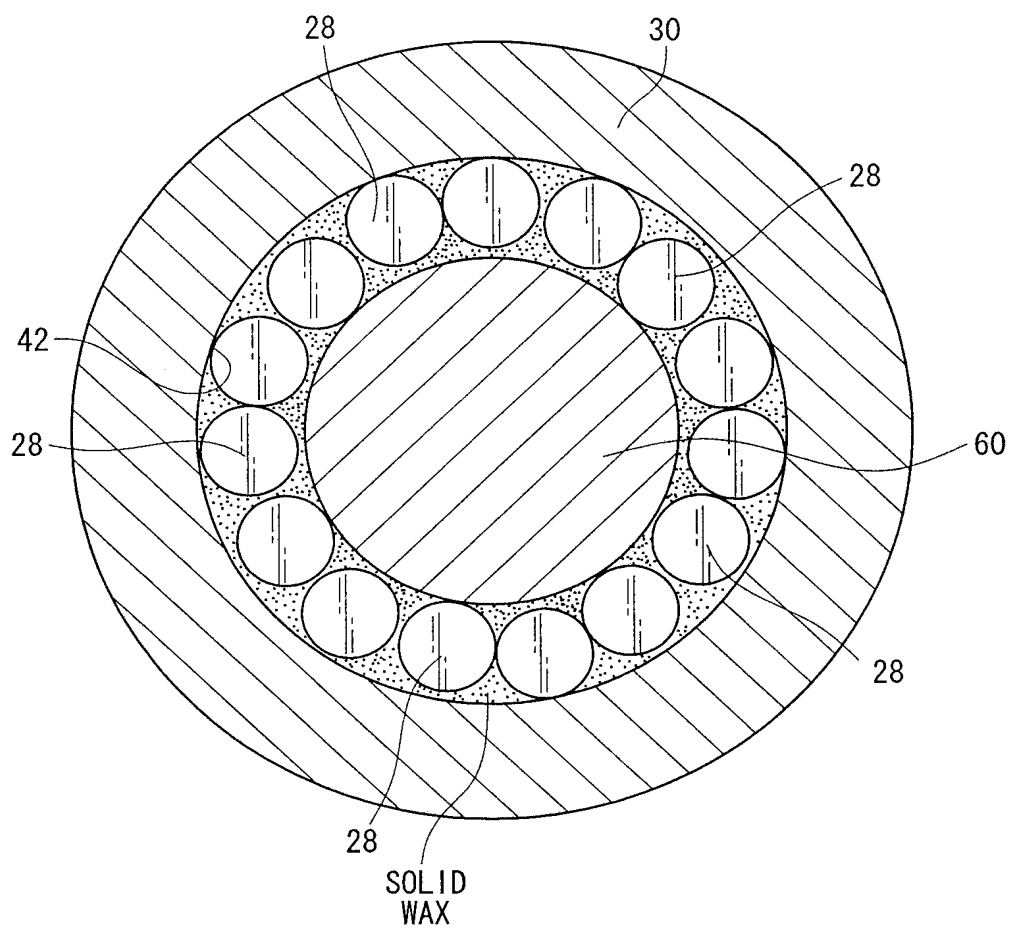


FIG. 24

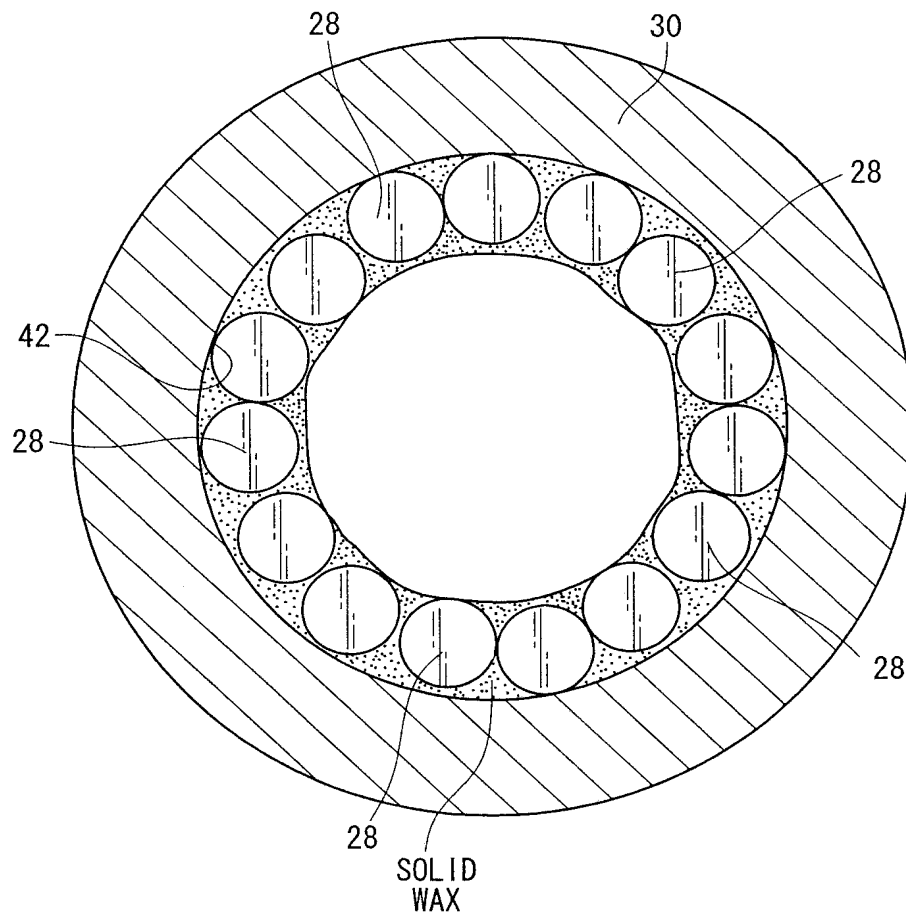




FIG. 25

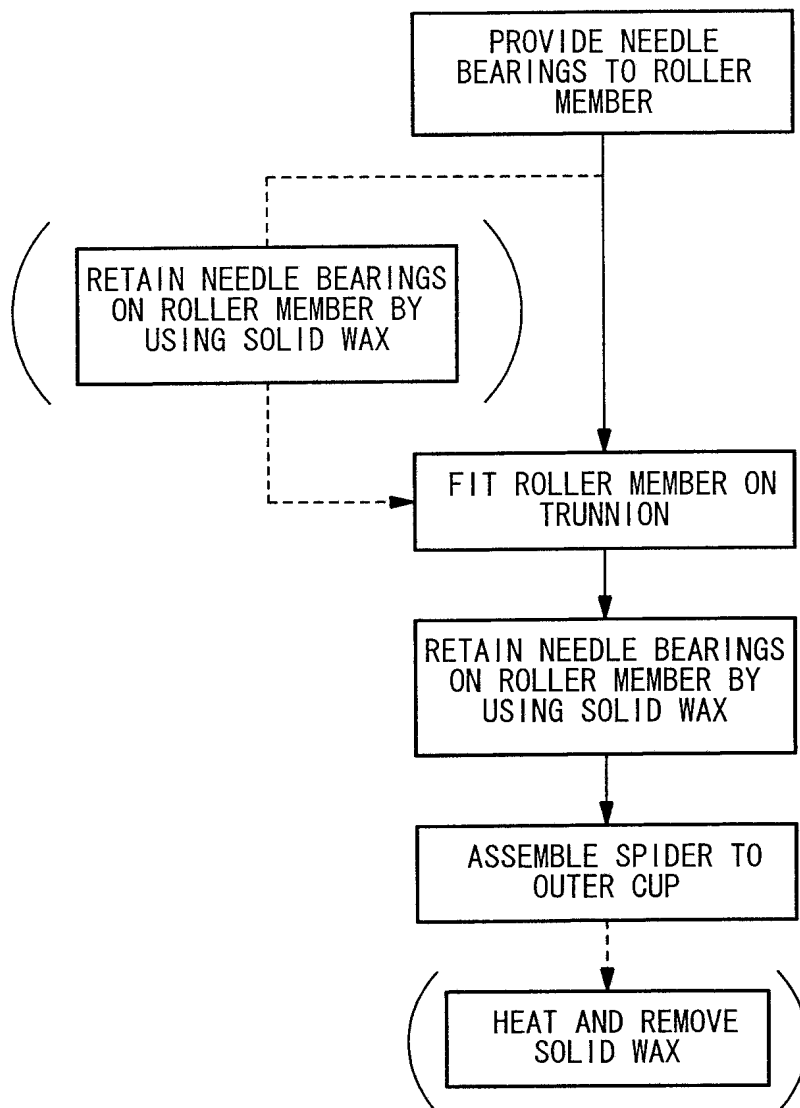


FIG. 26

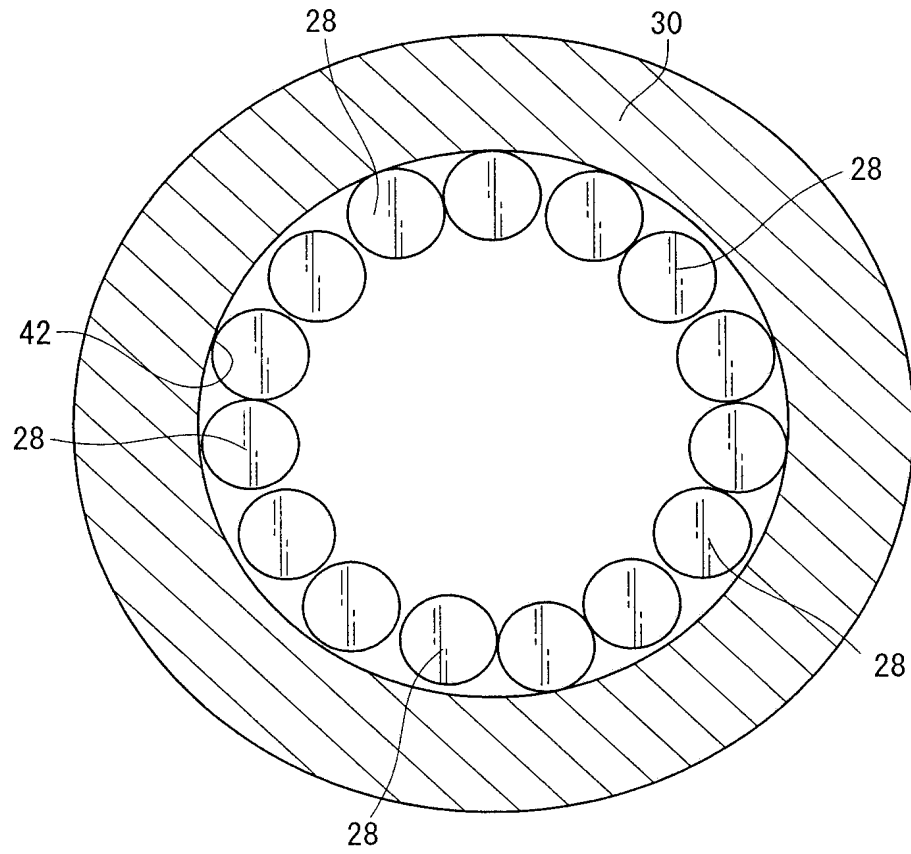


FIG. 27

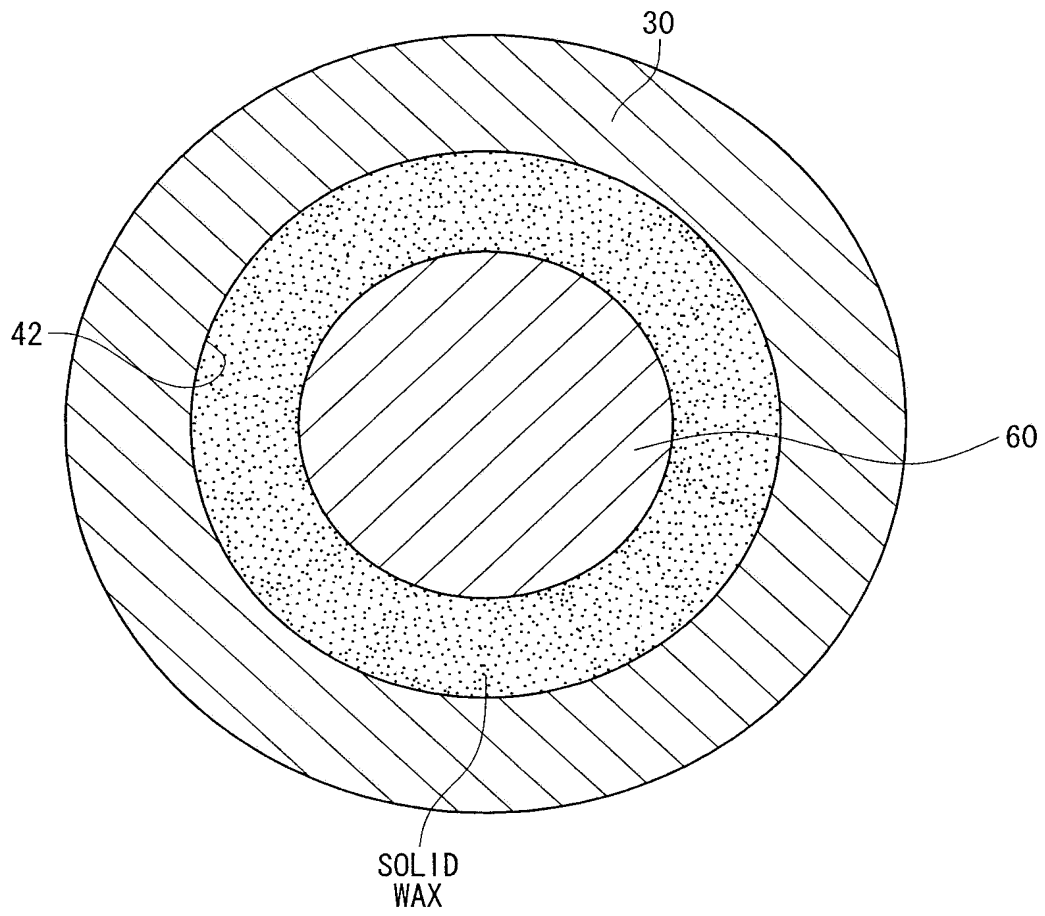


FIG. 28

